


Edward Valves Flow Control Solutions

World's leading supplier of gate, globe and check valves

Proven leading supplier of critical application valves for power generation plants

Experience In Motion



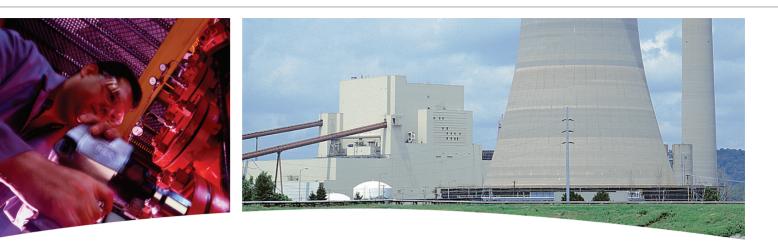

A History of Firsts

Feature	Benefit
Body-guided disks on globe and angle valves	Minimizes wear and ensure alignment for tight sealing
Integral Stellite hard-faced seats in globe and angle valves	Permits compact design and resist erosion
Hermetically sealed globe valves with seal-welded diaphragms	Prevents stem leakage in critical nuclear plant applications
Equalizers for large check and stop-check valves	Ensures full lift at moderate flow rates, and prevent damage due to instability
Compact pressure-seal bonnet joints	Eliminates massive bolted flanges on large, high-pressure valves
Qualified stored-energy actuators	Allows quick-closing valves in safety-related nuclear plant applications
Qualified valve-actuator combinations	Used in main steam and feed-water service throughout the world
Stainless steel spacer rings on gate valves, fitted between wedge halves	Simplifies service; damaged valve seats can be restored to factory fit by in-line replacement with slightly thicker ring
Unique two-piece, flexible wedges on gate valves	Automatically adjusts to any angular distortion of body seats; shape provides greater flexibility; ensures dependable sealing and prevents sticking
Impactor handwheels and handles	Allows workers to generate several thousand foot-pounds of torque, thus ensuring tight shutoff of manually operated globe and angle valves
Inclined-bonnet globe valves with streamlined flow passages	Minimizes pressure drop due to flow
Globe valves available with both vertical and inclined stems	Provides stem designs suited to any installation
Live-loaded pressure energized $PressurSeat^{}$ for globe valves	Globe valve design for high pressure drain and vent service

100 years of Reliability



High Performance for Critical Service

Temperatures that can exceed 1000°F. Pressures surpassing 10 000 psi. In critical service conditions, you can't take chances. You don't just meet standards, you exceed them. That's how Flowserve Edward forged and cast steel valves have become the specified choice for power plants, process facilities, and other high-temperature, high-pressure services.

Conservative Design

Flowserve Edward Valves takes a conservative approach to valve design. We meet all applicable codes and standards, but we go beyond that with finite element stress analysis of critical areas and rigorous proof testing. Edward valves are built to take punishment! And our extensive testing has also allowed us to develop extremely high flow efficiencies in all our valves. You'll find other unique design advantages with our varied product lines, such as our Equiwedge[®] gate valves with a two-piece wedge gate assembly that adjusts automatically to any angular distortion of the body seats. And many other design features, now considered "industry standard," started on the drawing boards at Flowserve.

Precision Manufacturing

Edward Valves also exceeds industry standards on the factory floor. Our forged valves are produced on a fully automated line, with CNC machining centers providing precise process control. And we maximize cast steel quality by producing our valve body castings using a directional solidification process from patterns designed by our own technicians. This process ensures high-strength, void-free castings for uncompromised quality. Even with the most advanced equipment, we feel our people make the real difference. Our production personnel have an average of 20 years in the industry, and 15 years with Flowserve! This exceptional experience allows us to achieve an extra degree of precision that can make a very real difference in the field.

In addition to our people, our procedures for quality assurance and lot-traceability have earned Flowserve Edward Valves the ASME N stamp and certification of our Raleigh, North Carolina, manufacturing facility for nuclear service valve production.

Lower Total Costs

Those tough standards have carried over into every valve we manufacture. We design and build our valves to last at least 40 years. That means not only are they tough, but they are designed with easy maintenance in mind. Considering the cost of valve failure, Flowserve Edward Valves quality is clearly worth specifying. That's been true since 1904, when the first Edward valve was made.


Today, as industrial companies become increasingly aware that operating expenses are part of total cost, the choice becomes more clear and critical than ever.





Flowserve Facts

- The company has maintained technical leadership in the power generation industry by continually updating equipment designs to meet every new regulation and operational requirement.
- In a field where valuable experience is in short supply, Flowserve valve and actuator engineering groups offer more than 1000 years of combined experience in power generation applications.
- We offer 24/7/365 support, including on-site mechanical services from highly experienced, factory-trained Flowserve field service technicians.





Global Service and Technical Support



Best Product/Best Customer Support

In today's fast-paced environment, it is not enough to have the best products. Today's applications demand the most experienced people, too. Flowserve products are supported by some of the industry's most highly experienced and skilled teams.

The Flowserve engineering teams have vast product and design experience in developing and adapting valve and actuator products for both general and specific critical applications of commercial nuclear power generation plants.

Flowserve application engineers are trained by original equipment design engineers to properly apply Flowserve designs to your application.

Our technical group has extensive commercial nuclear experience and is skilled at properly applying the company's products to solve end-users' problems.

Customers have direct access to Flowserve inside sales representatives and application engineers. This results in rapid, effective response to the customers' commercial or technical issues and the best customer-supplier interactions.

Flowserve quality assurance personnel are involved in the customer order process from day one and oversee the development of the quality plan, as well as its implementation from raw material vendors to Flowserve manufacturing, inspection, assembly and test processes. Flowserve also has a highly experienced and trained technical service group that is available 24 hours a day, seven days a week and 365 days a year.

Flowserve actively supports customers' needs to provide prompt, predictable progress during the administration of high-volume valve contracts.

Flowserve provides the shortest lead times, ensuring your project remains on time and within budget.







Edward Y-Pattern Globe Univalve



Edward Y-Pattern Globe Blow-Off Valve



Edward Angle Globe Univalve

Edward Forged Steel, Globe, Angle and Check Valves					
Description	Pressure Rating ¹	Size ¹	Ends		
Globe Stop Valves	ASME 600(110)*	½(15) thru 2(50)	Flanged		
	ASME 800(130)	1⁄4(6) thru 2(50)	Threaded, Socket		
	Series 1500	½(15) thru 2(50)	Threaded, Socket, Flanged		
	ASME 1690(290)*		Threaded, Socket, Buttwelding		
Univalve® Globe Stop Valves	ASME 2680(460)*	½(15) thru 4(100)			
	ASME 4500(760)				
Hermavalve Globe Stop Valves	ASME to 1690(290)*	½(15) thru 2½(65)	Socket, Buttwelding		
Blow-Off Stop Valves	ASME 300(50), 400(68) & 600(110)	1½(40) thru 2½(65)	Socket, Flanged, Buttwelding		
	ASME 1500(250) & 2500(420)		Socket, Buttwelding		
Hydraulic Stop Valves	5000 PSI CWP 10 000 PSI CWP	¼(6) thru 2(50)	Threaded, Socket, Flanged		
Globe Stop-Check Valves	ASME 600(110)*	½(15) thru 2(50)	Flanged		
	ASME 800(130)	¼(6) thru 2(50)	Threaded, Socket		
	Series 1500	½(15) thru 2(50)	Threaded, Socket, Flanged		
	ASME 1690(290)*		Threaded, Socket, Buttwelding		
Univalve Globe Stop-Check Valves	ASME 2680(460)*	½(15) thru 4(100)			
	ASME 4500(760)				
	ASME 600(110)*	½(15) thru 2(50)	Flanged		
Piston Check Valves	ASME 800(130)	1⁄4(6) thru 2(50)	Threaded, Socket		
	Series 1500	¼(6) thru 2(50)	Threaded, Socket, Flanged		
PressurCombo	ASME 1690*, 2680* & 4500	½(15) thru 4(100)	Socket, Buttwelding		
Univalve Piston Check Valves	ASME 1690(290)*		Threaded, Socket, Buttwelding		
	ASME 2680(460)*	½(15) thru 4(100)			
	ASME 4500(760)				
Hydraulic Check Valves	5000 PSI CWP & 10 000 PSI CWP	¼(6) thru 2(50)	Threaded, Socket, Flanged		
Ball Check Valves	ASME 800(130)	1/4(6) thru 2(50) Threaded, Socket	¹ / ₄ (6) thru 2(50)	Threaded Socket	
Dall Glieck valves	Series 1500				
Strainers	ASME 800(130) & Series 1500	1⁄4(6) thru 2(50)	Threaded, Socket		
Flanged Univalve	Class 1500(260)	½(15) thru 2(50)	Flanged		
Univalve Angle Stop, Stop-	ASME 1690(290)	½(15) thru 4(50) Socket, Buttweldi			
Check and Check Valves	ASME 2680(460)				
Continuous Blowdown Valves	ASME 1925	1(25) thru 4(100)	Socket, Buttwelding		
Nuclear Valves	Thru ASME 2500(420)*	to Size 32(800)	Buttwelding		

 $^{\ast}\mbox{These}$ values can be constructed and supplied for nuclear service.

1. Metric equivalent values for ratings and sizes are in parentheses.

Edward Cast Steel Gate, Globe, Angle and Check Valves

See Edward Cast Steel Valve Catalog for detailed information (EVENCT0002)

Description	Pressure Rating ¹	Size ¹	Ends	
Bolted Bonnet Globe and Angle	ASME 300(50)	2½(65) thru 12(300)	Buttwelding or Flanged	
Valves, Stop and Stop-Check (Non-Return) and Bolted Cover Piston Check	ASME 600(110)*	2½(65) thru 69(150)		
Pressure Seal Bonnet Globe and Angle Valves, Stop and Stop- Check (Non-Return)	ASME 600(110)*	8(200) thru 14(350)	Buttwelding or Flanged	
	ASME 900(150)*	3(80) thru 24(600)		
	ASME 1500(260)* & 2500(420)	2½(65) thru 24(600)		
Pressure Seal Cover, Piston Check Valves	ASME 600(110)*	8(200) thru 14(350)	Buttwelding or Flanged	
	ASME 900(150)*	8(200) thru 24(600)		
	ASME 1500(260)* & 2500(420)	2½(65) thru 24(600)		
Equiwedge® Gate Valves	ASME 600(110)* & 900(150)*	2½(65) thru 32(800)	Buttwelding or Flanged	
	ASME 1500(260)* & 2500(420)	2½(65) thru 24(600)		
	ASME 3600	16(400) thru 24(600)	Buttwelding	
Flite-Flow [®] Globe Valves, Stop and Stop-Check (Non-Return)	ASME 300(50)	3(80) thru 16(400)		
	ASME 400(68)	3(80) thru 4(100)	- - Buttwelding or Flanged -	
	ASME 600(110)*	3(80) thru 32(800)		
	ASME 700(120)	6(150) thru 32(800)		
	ASME 900(150)*	6(150) thru 16(400)		
	ASME 1100(190)	3(80) thru 4(100)		
	ASME 1500(260)* & 2500(420)	3(80) thru 24(600)		
	ASME 1800(310) & 2900 (490)	3(80) thru 4(100)		
	ASME 2000(340)	12(300) thru 14(350)	Buttwelding	
	ASME 3600	16(400) thru 24(600)		
	Series 4500	4(100) thru 10(250)	Buttwelding or Flange	
	ASME 300(50)	2½(65) thru 16(400)	Buttwelding or Flanged	
	ASME 400(68)	3(80) thru 4(100)		
	ASME 600(110)*	3(80) thru 32(800)		
	ASME 700(120)	3(80) thru 4(100)		
	ASME 900(150)*	3(80) thru 16(400)		
Flite-Flow Piston Check Valves	ASME 1100(190)	3(80) thru 4(100)		
	ASME 1500(260)* & 2500(420)	3(80) thru 24(600)		
	ASME 1800(310) & 2900 (490)	3(80) thru 4(100)		
	ASME 2000(340)	12(300) thru 14(350)		
	ASME 3600	16(400) thru 24(600	Buttwelding	
	Series 4500	4(100) thru 10(250)	Buttwelding or Flange	
	ASME 600(110)*	6(150) thru 20(500)	Buttwelding	
Tilting Disk Check Valves	ASME 900(150)*, 1500(260)* & 2500(420)	2½(65) thru 24(600)		
	Class 4500(760)	6(150) & 8(200)		
Nuclear Valves	Thru ASME 2500(420)*	to Size 32(800)	Buttwelding	
Special Application Valves	Thru ASME 2500(420)	to Size 18(450)	As Required	



Equiwedge Gate Valve



Edward Flite-Flow Y-Pattern Globe Valve



Edward Flite-Flow Y-Pattern Globe Valve




Edward Tilting Disc Check Valve

*These valves can be constructed and supplied for nuclear service.

1. Metric equivalent values for ratings and sizes are in parentheses.



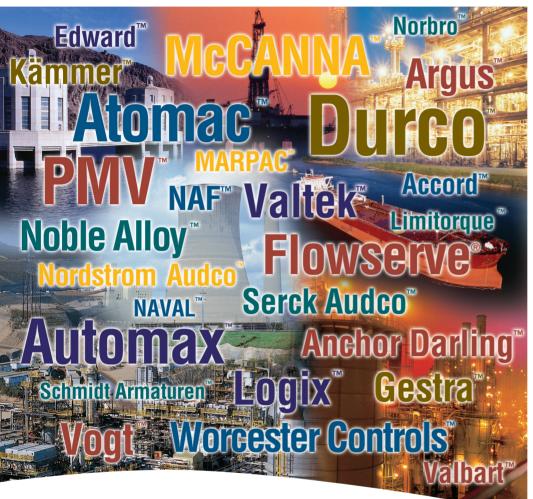

FCD EVENBR1006-01 (E) November 2013. © 2013 Flowserve Corporation

Consult your local stocking distributor or for more information about Flowserve Corporation, visit www.flowserve.com.

United States

Flowserve Corporation Flow Control 1900 South Saunders Street Raleigh, NC 27603 Telephone: +1 919 832 0525 Telefax: +1 919 831 3369

flowserve.com