

### Dual seal barrier fluid system

The 682-53B seal system is Flowserve's most popular solution for dual mechanical seal barrier fluid systems. Designed to meet the rigorous demands of the oil and gas, refinery and petrochemical industries, it is optimized for value and reliability. Also, it can be assembled regionally with shorter lead times.

#### Designed with our customers in mind

This rugged unit is fully compliant with API 682 (4<sup>th</sup> edition) specifications. It utilizes a bladder accumulator to supply pressurized barrier fluid to dual mechanical seals without the need for an external pressurizing source. It is ideal for high-pressure and remote services.


Butt-welded piping with Class 600 flanges comes standard, while componentry preferred by Flowserve ensures maximum reliability and value. Pre-engineered optional packages offer application versatility with reduced costs and lead times.

#### Standard features include:

- Butt-welded piping
- Class 600 flanged connections
- Large 35 L (10 gallon) bladder accumulator with carbon steel shell and high-duty offshore paint (optional 316 stainless steel shell available)
- Stainless steel stand with multiple seal cooler mounting heights
- Fixed-alarm strategy
- Sunshades included as standard
- Optional instrumentation trim packages

#### Custom Plan 53B units

The 682-53B seal system can save you thousands of dollars and reduce lead times by 12 weeks or more, but its standardized components may not meet your preferences. Should that occur, Flowserve still provides fully customized Plan 53B systems to your particular specifications.

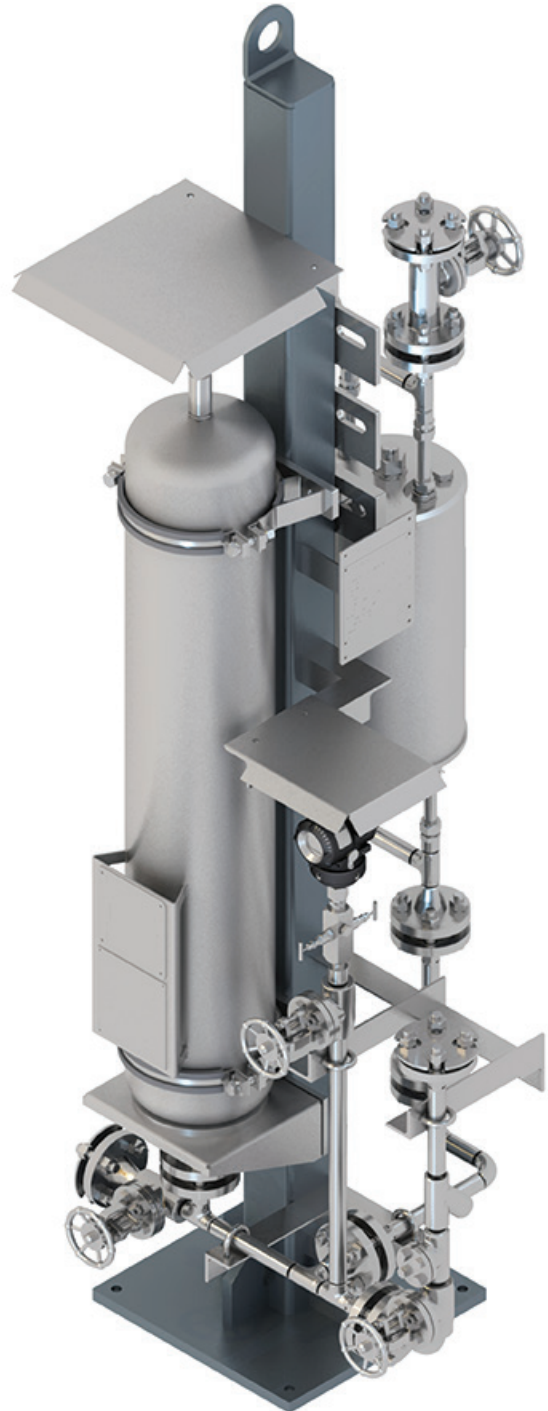

*Flowserve 682-53B seal support system with 682H Seal Cooler*

**Model numbers**

Example:	Model	Accumulator	Certifications	Cooler Model	Connections	Trim Package	Options Package	Pump Height
<b>53BC0AF06G0100L</b>	<b>53B</b>	<b>C</b>	<b>0</b>	<b>A</b>	<b>F06</b>	<b>G01</b>	<b>00</b>	<b>L</b>
<b>53BS0AF06G0100H</b>	<b>53B</b>	<b>S</b>	<b>0</b>	<b>A</b>	<b>F06</b>	<b>G01</b>	<b>00</b>	<b>H</b>

Model: 53B
Accumulator: C (Carbon steel/Buna), S (316/Buna)
Certifications: 0 (U-Stamp accumulator) 1 (PED), 2 (U-Stamp accumulator and seal cooler)
Cooler Model: A (682H)
Connections: F06 (Cl 600 RFBW)
Trim Package: G01 (Global)
Options Package: 00 (No options)
Pump Centerline: L (low), M (medium), H (high)

For more information, please contact your local Flowserve representative.

**SSFLY000258 (EN/A4)** January 2021

**Headquarters**

Flowserve Corporation  
 5215 North O'Connor Blvd.  
 Suite 2300  
 Irving, Texas 75039-5421 USA  
 Telephone: +1 937 890 5839

**USA and Canada**

Kalamazoo, Michigan USA  
 Telephone: +1 269 381 2650

**Europe, Middle East, Africa**

Etten-Leur, The Netherlands  
 Telephone: +31 765 028 200

**Asia Pacific**

Singapore  
 Telephone: +65 6544 6800

**Latin America**

Mexico City  
 Telephone: +52 55 5567 7170

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2021 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.