



MSX Solids Handling, Submersible Pumps

Bulletin PS-50-2i (E)



Pump Supplier To The World

Flowserve is the driving force in the global industrial pump marketplace.

No other pump company in the world has the depth or breadth of expertise in the successful application of pre-engineered, engineered, and special purpose pumps and systems.

Pumping Solutions

Flowserve is providing pumping solutions that permit customers to continuously improve productivity, profitability and pumping system reliability.

Market-Focused Customer Support

Product and industry specialists develop effective proposals and solutions directed toward market and customer preferences. They offer technical advice and assistance throughout each stage of the product life cycle, beginning with the inquiry.

Dynamic Technologies

Flowserve is without peer in the development and application of pump technology, including:

- Hydraulic engineering
- · Mechanical design
- · Materials science
- · Intelligent pumping
- Manufacturing technology

Broad Product Lines

Flowserve offers a wide range of complementary pump types, from pre-engineered process pumps, to highly engineered and special purpose pumps and systems. Pumps are built to recognized global standards and customer specifications.

Pump designs include:

- Single-stage process
- Between bearing single-stage
- Between bearing multistage
- Vertical
- Submersible motor
- Positive displacement
- Nuclear
- Specialty





MSX Solids Handling, Submersible Pumps

Rugged and Reliable

The Flowserve MSX family of solids handling, submersible pumps is engineered to perform efficiently in the most challenging environments, from pumping raw sewage to moving industrial wastewater and other solid-laden liquids.

Operating and Cost-Saving Benefits

MSX non-clog pumps reduce operating costs while providing long-life operation with minimal downtime.

- High efficiency
 - Superior hydraulic capability
 - Outstanding wire-to-water efficiency
- EPACT-rated high performance motors
- Complete hydraulic and motor coverage
- · Solid reliability
- Long-lasting seal and bearing designs
- Closed-loop cooling system for improved heat transfer
- Spike-resistant windings for extended motor life
- High-quality materials of construction


Broad Application

- Raw sewage
- · Return-activated sludge
- · Waste-activated sludge
- · Mixed liquor
- Final effluent
- Filter backwash
- Dewatering
- Industrial process
- Industrial waste collection
- Flood protection

Complementary Pump Designs

Depending upon application requirements, Flowserve can also provide these pump designs:

- End suction, sidedischarge, mixed-flow, non-clog pumps
- · Vertical, wet-pit pumps

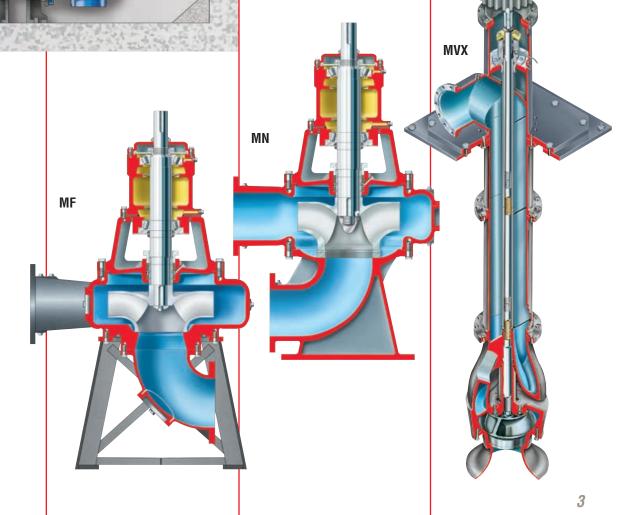



MSX Solids Handling, Submersible Pumps

Flowserve MSX pumps are expressly designed to handle sewage and wastes of almost every form and description, including both solids in solution and solids in suspension.

Absolute reliability is the most critical requirement for these pumps. MSX-Series 1 mediumcapacity and MSX-Series 2/3 high-capacity pumps provide that assurance along with long life, cost-efficient performance.

Operating Parameters

- Flows to 4545 m³/h (20 000 gpm)
- Heads to 90 m (300 ft)
- Sizes 80 mm (3 in) to 500 mm (20 in)
- Motors to 224 kW (300 hp)
 - FM-approved version available for explosion-proof service
 - Variable-speed drives available
- Solids handling capability to 80 mm (3 in) spherical

Industries Served

- · Water resources
- Mining
- Agriculture
- · General industry

Accessories


- Control panels
- Lifting chains
- Access covers
- · Guide rail assemblies
- · Level control floats
- · Telemetry devices
- Valves

MSX-Series 1 Design Features

EPACT Rated Motor* offers high-efficiency performance for impressive energy savings.

Shaft and Rotor are dynamically balanced for reduced vibration to assure smooth operation and long service life.

Class H Rated Insulation System significantly extends motor life.

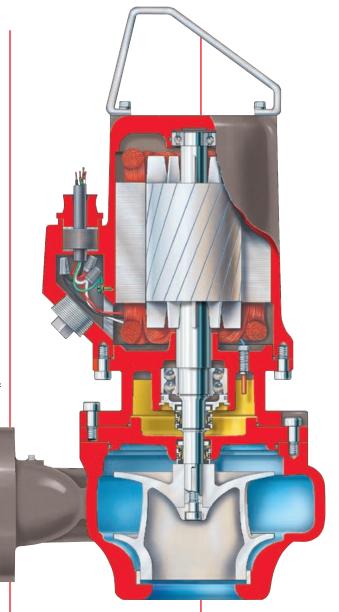

Watertight Cable Entry protects motor from moisture and contamination, thus extending its operating life.

Impeller Wear Ring in stainless steel available as an option for extended impeller life.

Spike-Resistant Windings are standard. In addition to smooth, consistent motor performance, this feature permits the handling of voltage spikes with variable frequency drive motor option.

Long-Life, Angular Contact Bearings support axial and radial thrust loads for superior bearing and seal life.

Sealing Fluid is environmentally friendly to eliminate media contamination concerns.

Silicon Carbide Seal Faces in the lower mechanical seals provide durability and reliability. Upper mechanical seal faces are carbon/ceramic.


High-Efficiency Hydraulics reduce energy consumption and operating cost while providing constant, predictable pumping performance.

Extensive Hydraulic Coverage is achieved with discharge sizes of 80 mm (3 in) through 150 mm (6 in).

Higher Overall Wire-to-Water Efficiencies.

* First motor to meet U.S. Energy Policy Act's (EPACT) efficiency regulations



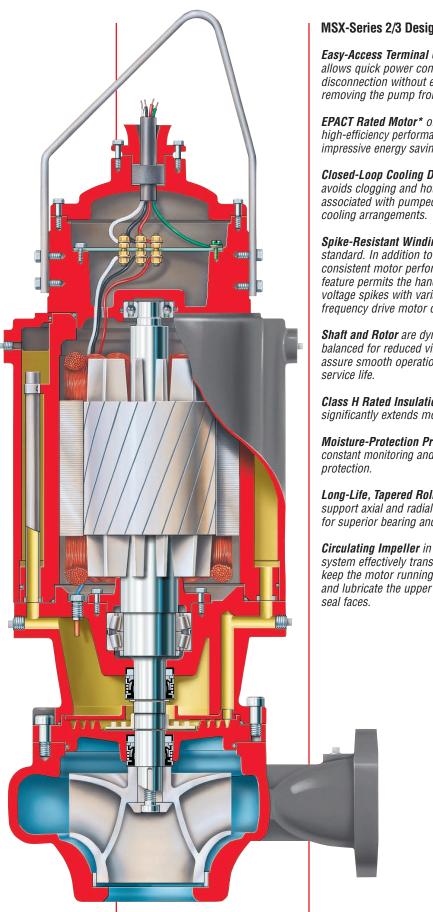

MSX-Series 2/3 Design Features

Easy-Access Terminal Chamber allows quick power connectiondisconnection without entirely removing the pump from service.

EPACT Rated Motor* offers high-efficiency performance for impressive energy savings.

Closed-Loop Cooling Design avoids clogging and hot spots associated with pumped media

Spike-Resistant Windings are standard. In addition to smooth, consistent motor performance, this feature permits the handling of voltage spikes with variable frequency drive motor option.

Shaft and Rotor are dynamically balanced for reduced vibration to assure smooth operation and long

Class H Rated Insulation System significantly extends motor life.

Moisture-Protection Probe provides constant monitoring and motor

Long-Life, Tapered Roller Bearings support axial and radial thrust loads for superior bearing and seal life.

Circulating Impeller in the cooling system effectively transfers heat to keep the motor running smoothly and lubricate the upper mechanical Sealing and Cooling Oil are environmentally friendly to eliminate contamination concerns.

Heat Exchanger in the closed loop cooling system provides additional motor cooling protection.

Impeller Wear Ring supplied in hardened stainless steel as a standard for extended impeller life.

Silicon Carbide Seal Faces in the lower mechanical seals provide durability and reliability. Upper mechanical seal faces are carbon/ceramic.

High-Efficiency Hydraulics reduce energy consumption and operating costs while providing constant, predictable pumping efficiency.

High Overall Wire-to-Water Efficiencies.



Technical Data and Options

Wet-Pit Mounting Option



Complementary Equipment

- Controls
- · Level switches
- Valves
- Access covers
- Hoists
- Testing

Dry-Pit Mounting Option




Transportable Option



Standard Materials
Cast Iron, ASTM A48, CL30
Cast Iron, ASTM A48, CL30 or
ASTM A743, Grade CA40
Cast Iron, ASTM A48, CL30
ASTM A487, Grade CA15
Cast Iron, ASTM A48, CL30
Type 316 SS
Type 416 SS
Buna-N
Neoprene
Corrosion-resistant paint
Type 416 SS/Type 316 SS

MSX Range Chart

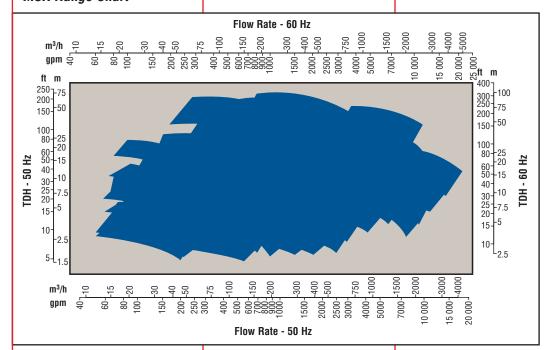



Global Engineered Services and Support

Total Cost Reduction Asset Management Product Life Cycle Performance Re-rates Site Diagnostics Repair Services Energy Management Spare Parts Maintenance Contracts Materials Upgrades Turnkey Services Field Repairs Installation **Project Supervision** Commissioning **Equipment Upgrades Condition Monitoring** Systems Analysis Field Machining

Service Dedication

Flowserve Engineered Services is focused on providing customers with uncompromising service and support, where and when needed. Dedicated to delivering the highest quality support, Engineered Services integrates its extensive pump and materials engineering knowledge with creative service solutions. Engineered Services fully understands the business challenges facing customers and is prepared to manage solutions to succeed as a team.

A worldwide network of service and repair centers staffed by highly skilled engineers and technicians is available around the clock, seven days a week to respond to customer queries, evaluate and troubleshoot problems and provide reliable solutions.

Strength of Experience, Commitment to Excellence


Flowserve has long served industries requiring superior equipment performance and service life.

- · Oil and gas production
- Hydrocarbon processing
- · Chemical processing
- Water resources
- · Power generation
- Nuclear
- · Mining and mineral processing
- · Pulp and paper
- General industry

Engineered Services is dedicated to maximizing equipment performance and providing reliability-centered maintenance programs for pumps and related equipment, regardless of manufacturer. Using the FlowStar™ asset management software, Engineered Services tracks performance and supports improvement programs using a service life cycle cost business approach. The results are improved reliability and

Business Partner

Flowserve partners with customers to respond to the dynamic business conditions that affect them. Flowserve will work with customers to drive efficiency, maximize throughput and control process quality. Whether user needs involve onsite technical assistance or broader project planning with full turnkey responsibility, Flowserve Engineered Services will deliver professional, reliable results.

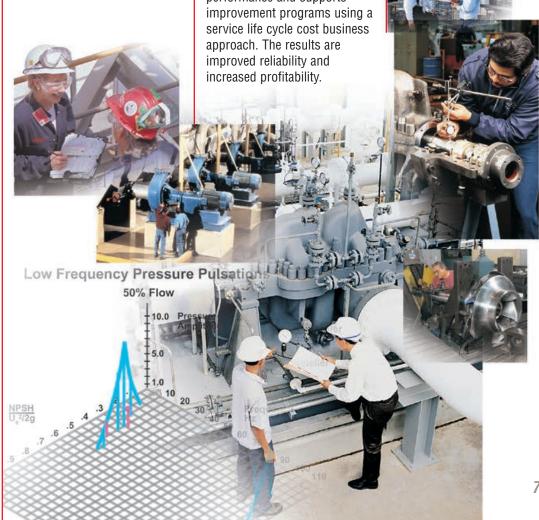



USA and Canada

Flowserve Corporation 5215 North O'Connor Blvd. Suite 2300 Irving, Texas 75039-5421 USA Telephone: +1 937 890 5839

Europe, Middle East, Africa

Flowserve Corporation Parallelweg 13 4878 AH Etten-Leur The Netherlands Telephone: +31 76 502 8100



Your local Flowserve representative:

To find your local Flowserve representative, please use the Sales Support Locator System found at www.flowserve.com or call: +1 937 890 5839.

Latin America

Flowserve Corporation
Martín Rodriguez 4460
B1644CGN-Victoria-San Fernando
Buenos Aires, Argentina
Telephone: +54 11 4006 8700
Telefax: +54 11 4714 1610

Asia Pacific

Flowserve Pte. Ltd. 10 Tuas Loop Singapore 637345 Telephone: +65 6771 0600 Telefax: +65 6862 2329