

Norbro[®] Rack and Pinion Pneumatic Actuators

Quick-Ship Program – Europe



Experience In Motion

High-performance Norbro pneumatic actuators ship in one week or less

Speed is everything during routine maintenance and emergency repairs. Every hour of downtime can cost your operation millions in revenue. Getting replacement parts quickly could mean sacrificing quality for speed.

But that's not the case with Norbro pneumatic actuators.

With the Norbro Pneumatic Actuator Quick-Ship Program, you'll receive quality, Flowserve manufactured and tested actuators anywhere in Europe — typically in one week or less. And in many cases, we can ship actuators within 48 hours, so you can reduce downtime and keep your operation moving.

Reduced maintenance-related downtime

The most common sizes and configurations of the Norbro pneumatic actuators, double acting or spring return, can be shipped to you in one week or less, minimizing downtime and allowing you to return to operations faster. Delivery times vary, depending on your application, configuration and geographic location.

Get high-quality actuators fast, without compromises

With the Norbro Pneumatic Actuator Quick-Ship Program, you'll have confidence that you're getting proven Norbro quality. All actuators supplied under the program are made from high-quality materials and tested to meet stringent Flowserve requirements. They also conform to ATEX 94/9/EC equipment group II, category 2 (non-mining) and are certified to IEC 61508 to SIL level 3.

Superior performance

Norbro rack and pinion pneumatic actuators offer superior control performance with limit stops in both stroke directions. Interchangeability of mounting kits and greater mechanical strength are enabled by a standard ISO 5211 mounting pattern with star or square drive output. Minimal wear, safety and superior service life are provided by a unique moving guide rod design.




Available configurations

Model code	Model code
05-RKA40-1SD0N0-B	25-RDA40-1SD1E0-E
05-RKB40-1SD0N0-B	25-RDC40-1SDMN0-E
10-RDA40-1SDMN0-E	30-RDA40-1SDMN0-D
10-RDA40-1SD1E0-E J-SWITCH	30-RDA40-1SD1E0-D
10-RDA40-1SD1N0-E	30-RDB40-1SDMN0-D
10-RDB40-1SDMN0-E	30-RDB40-1SD1E0-D
10-RDB40-1SDBE0-E	30-RDC40-1SDMN0-D
10-RDB40-1SD1E0-E J-SWITCH	30-RDC40-1SD1E0-D
15-RDA40-1SDMN0-D	33-RDA40-1SDMN0-D
15-RDA40-1SDBE0-D	33-RDB40-1SDMN0-D
15-RDA40-1HDBE0-D	33-RDC40-1SDMN0-D
15-RDA40-1SD1E0-D J-SWITCH	33-RDB40-1SD1E0-D
15-RDB40-1SDMN0-D	33-RDB33-1SD1Z0-D
15-RDC40-1SDMN0-D	33-RDD40-1SDMN0-D
15-RDB40-1SDBE0-D	35-RDA40-1SDMN0-D
15-RDB40-1SD1E0-D	35-RDA40-1SD1E0-D
20-RDA40-1SDMN0-D	35-RDB40-1SDMN0-D
20-RDA40-1SD1E0-D J-SWITCH	35-RDB40-1SD1E0-D
20-RDB40-1SDMN0-D	35-RDC40-1SDMN0-D
20-RDB40-1SDMN0-D Z920	40-RDA40-1SDTN0-A
20-RDC40-1SDMN0-D	40-RDA40-1SD1E0-A
20-RDB40-1SDBE0-D	40-RDB40-1SDTN0-A
20-RDB40-1SD1E0-D J-SWITCH	40-RDC40-1SDTN0-A
25-RDA40-1SDMN0-D	40-RDD40-1SDTN0-A
25-RDA40-1HDMN0-E	40-RDB40-1SD1E0-A
25-RDB40-1SDMN0-D	42-RDB40-1SD1E0-0
25-RDB40-1SD1E0-E	42-RDC40-1SDTN0-0

If you need an actuator type not listed here, please contact your local Flowserve representative. Rapid conversions (i.e., spring configurations, reverse direction of operation, fast acting) and other delivery options may be available via the Quick-Ship program.



Norbro Series 40R and 33 actuator product code

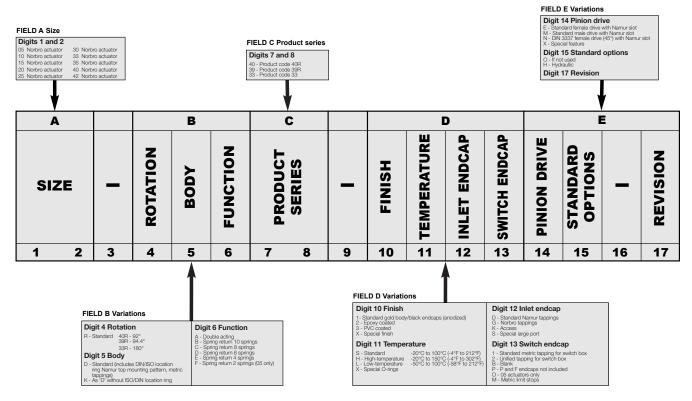

*This table details options for all Norbro Series 40R and 33 actuators. Consult the chart on page 3 for configurations available via the Quick-Ship program.

Headquarters

Flowserve Corporation 5215 North O'Connor Blvd. Suite 700 Irving, Texas 75039-5421 USA

Distribution Plant

Flowserve B.V. Flow Control Benelux Rechtzaad 17 4703 RC Roosendaal/Netherlands Telephone: +31-165-598-800 Email: <u>RSL_FCD-info@flowserve.com</u> Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a waranter yor guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2023 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

AIFLY001092-01 (EN/AQ) June 2023